Wet Scrub Resistance Test






Erichsen Srub Resistance Tester applying abrasive forces with a nylon brush or pads onto the tile surface



KAKOPROM

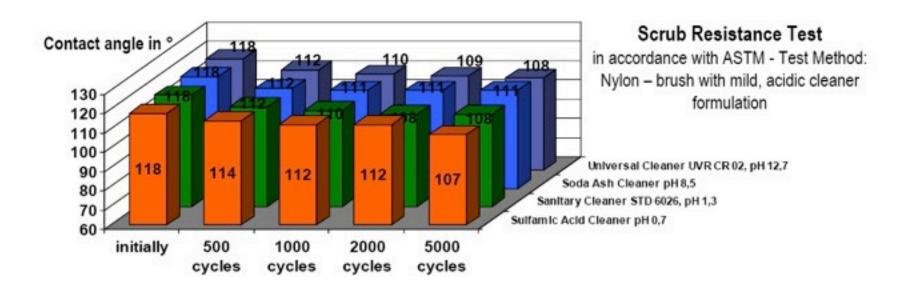

Test Conditions

Srcub test with continuous feed of a cleaning solution on the tile while scrubbing the tile with a nylon brush and standardized force, after 500, 1000, 2000 and 5000 cycles the scrub test was stopped and the contact angle was measured using the dynamic method